




UNITED MILLING SYSTEMS

Discmill® MHA600



The patented **UMS DISCMILL® TYPE MHA600** is designed for a range of size-reduction applications, particularly in the cereal grain milling industry.

The main characteristic of this unique grinding technology is very high productivity in relation to the machine's physical size and energy consumption.

Finished product granulation can be controlled over a wide range by the choice of corrugations on the grinding elements, selection of the peripheral speed of the rotating disc and, whilst in operation, by adjusting the gap between the discs.

Depending upon the product and the desired granulation, the type MHA600 Discmill has a capacity of up to 3000 kg per hour.

The type MHA600S is equipped with a single row of grinding elements, whereas the type MHA600D has a double row giving 80% more grinding surface.

BENEFITS

Compact, self-contained design

minimizes space requirement and installation cost

Easily accessible and durable wearing parts

keep maintenance costs low

Rapid disc and element replacement

minimizes down-time and operating costs

Exchangeable grinding elements in various corrugation patterns


cover a wide range of applications

Simple, accurate handwheel adjustment of the grinding gap

leads to consistent and uniform finished product characteristics

Large grinding surface and no integral screen

gives high capacity and low power consumption

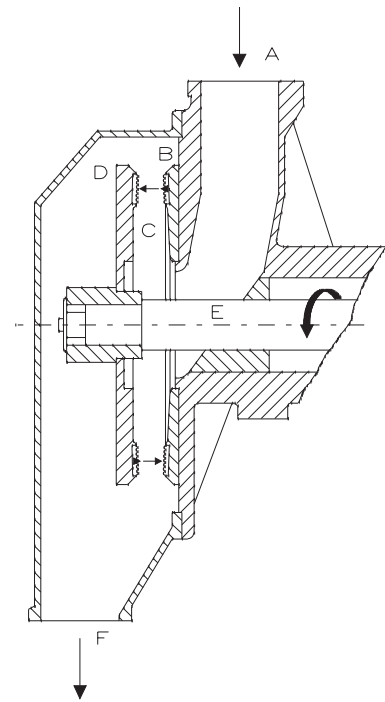

Operation

A regular and constant flow of product enters the inlet (A), located at the top of the Discmill, and travels through the center of the stationary disc (B) into the milling chamber (C).


The rotating disc (D), mounted on the center shaft (E), is equipped with vanes that accelerate and evenly distribute the product over the grinding surface of the two discs.

The distance between the discs can be accurately adjusted, during operation, by means of a handwheel, allowing the desired finished product granulation to be achieved. No integral screen is employed and in many applications subsequent sifting is also unnecessary.

The peripheral speed of the rotating disc is selected to suit the application, as is the corrugation pattern on the exchangeable grinding elements. The grinding elements are made from a special wolfram carbide alloy which gives exceptional wear resistance.

The ground product is discharged via the outlet (F).

It is recommended that the milling chamber be kept under slight negative pressure, either from a suction pneumatic conveying line connected to the outlet or from an exhaust system.

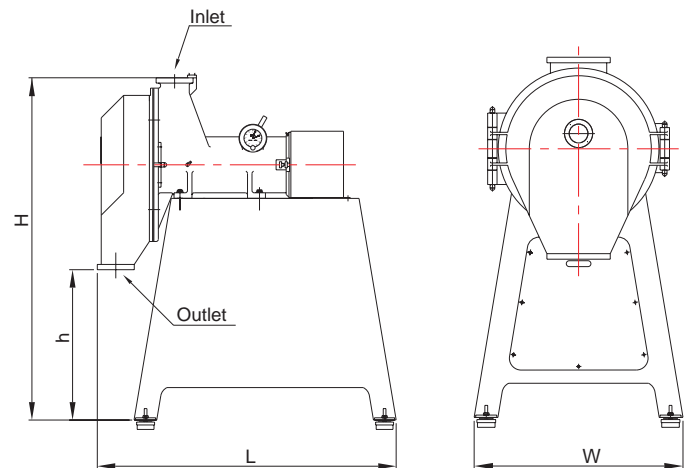

DIMENSION TABLE

	L mm	W mm	H/h mm	Weight net kg	Weight gross kg	Ship.vol. m ³	Motor kW	Cap. kg/h
MHA600S	1335	890	1530/ 670	795	860	2.5	22-30	1000- 1500
MHA600D	1335	890	1530/ 670	825	890	2.5	37	1500- 3000

UNITED MILLING SYSTEMS

HEAD OFFICE:
BANEMARKSVEJ 50 A • DK-2605 BRØNDBY • DENMARK
TEL +45 70 22 27 11 • FAX +45 70 22 27 12
E-MAIL umsmail@ums.dk • WEB www.ums.dk

US OFFICE:
5775 WAYZATA BLDV, SUITE 700
ST. LOUIS PARK • MN 55416
TEL +1 952 582 2929 • FAX +1 952 543 0462



UK OFFICE:
OAKWOOD HOUSE • CARTFORD LANE
LITTLE ECCLESTON • PRESTON PR3 0YP
TEL +44 (0) 1995 672 556 • FAX +44 (0) 1995 672 425